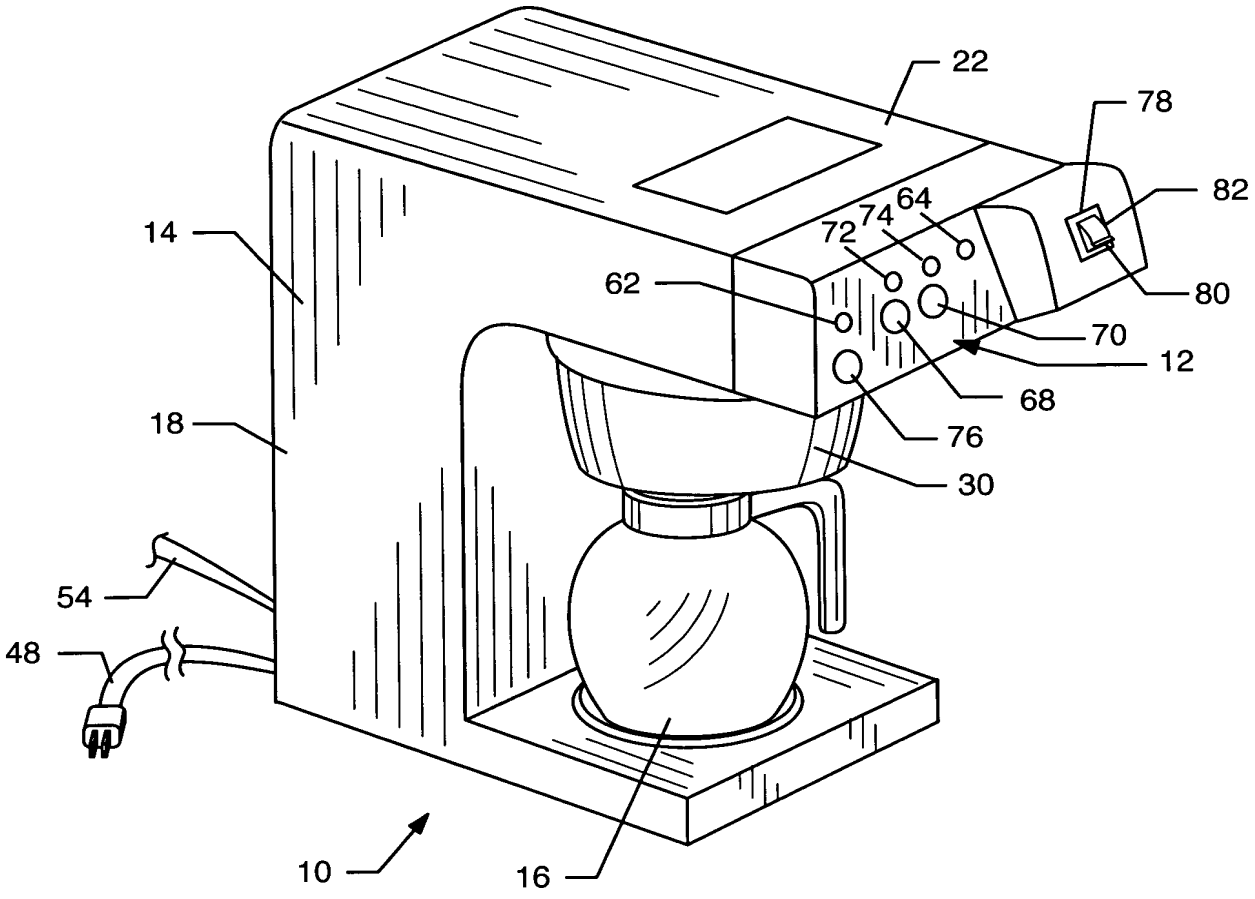

FIG. 1

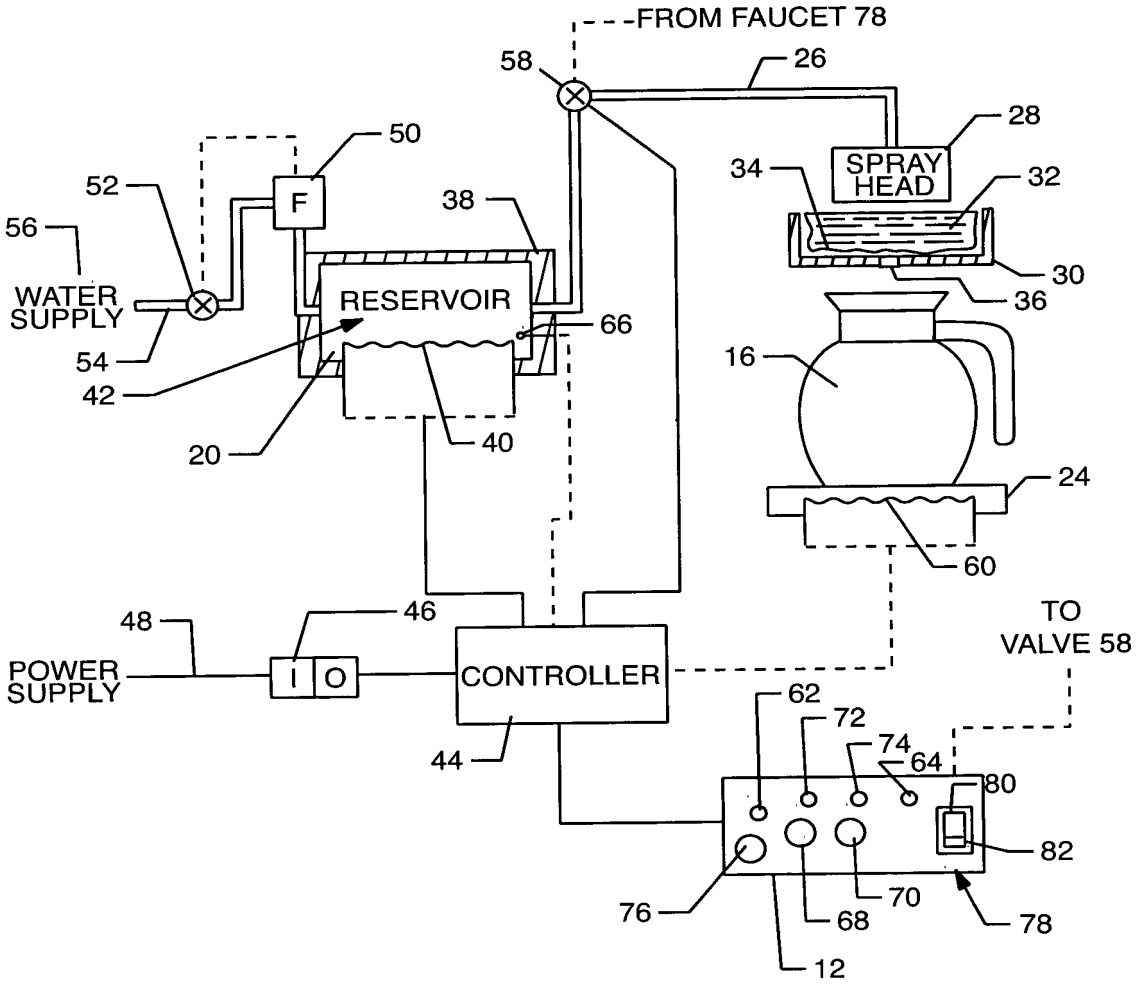
FROM FAUCET 78
58
26
28
SPRAY HEAD
34
32
50
52
F
38
56
WATER SUPPLY
RESERVOIR
66
30
36
54
42
16
20
40
24
60
48
46
TO VALVE 58
POWER SUPPLY
I
O
CONTROLLER
62
72
74
64
80
44
82
76
70
68
78
12

FIG. 2

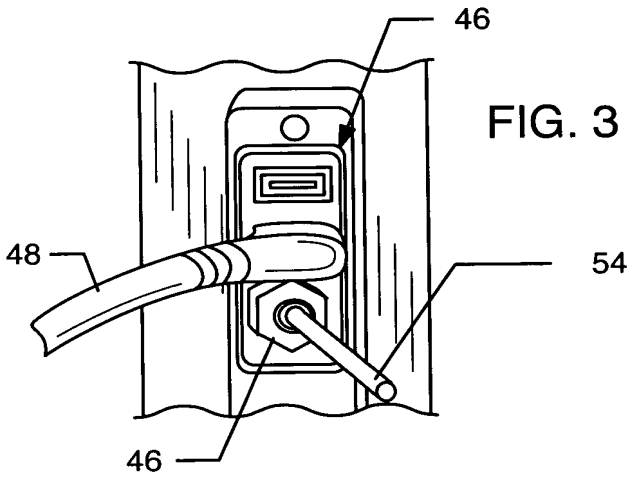

FIG. 3

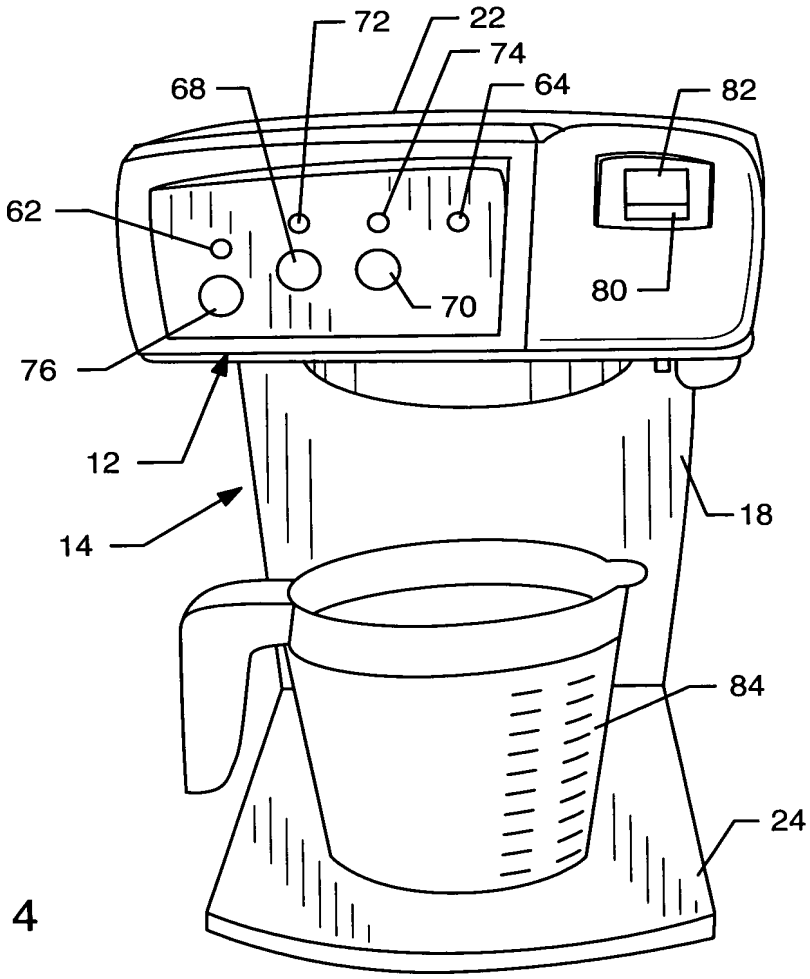

FIG. 4

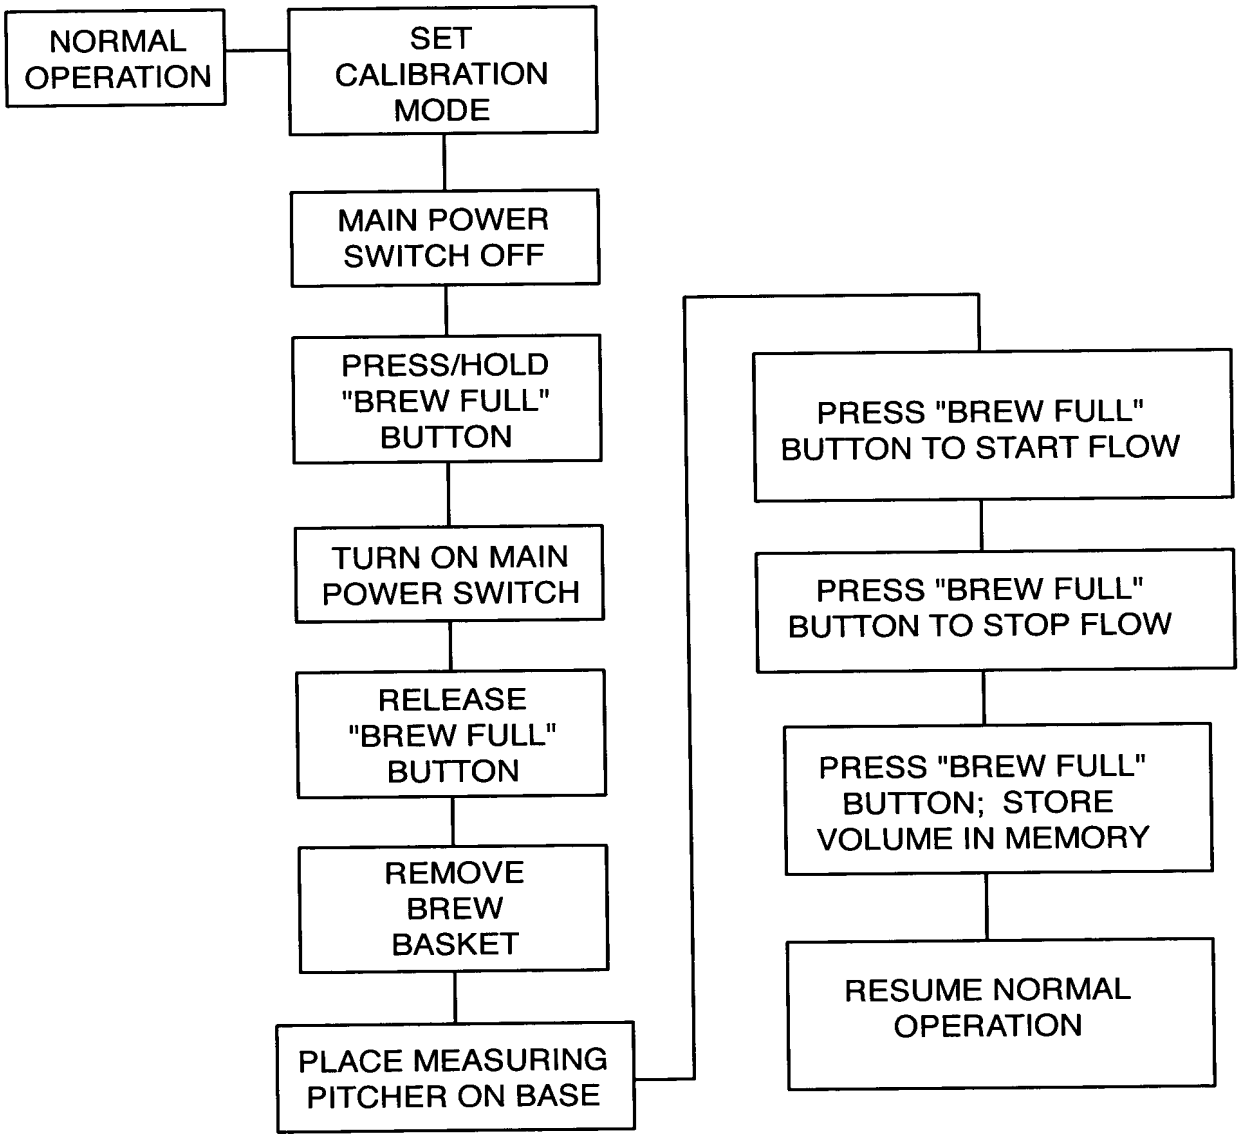
NORMAL OPERATION
SET CALIBRATION MODE
MAIN POWER SWITCH OFF
PRESS/HOLD "BREW FULL" BUTTON
TURN ON MAIN POWER SWITCH
RELEASE "BREW FULL" BUTTON
REMOVE BREW BASKET
PLACE MEASURING PITCHER ON BASE
PRESS "BREW FULL" BUTTON TO START FLOW
PRESS "BREW FULL" BUTTON TO STOP FLOW
PRESS "BREW FULL" BUTTON; STORE VOLUME IN MEMORY
RESUME NORMAL OPERATION

FIG. 5

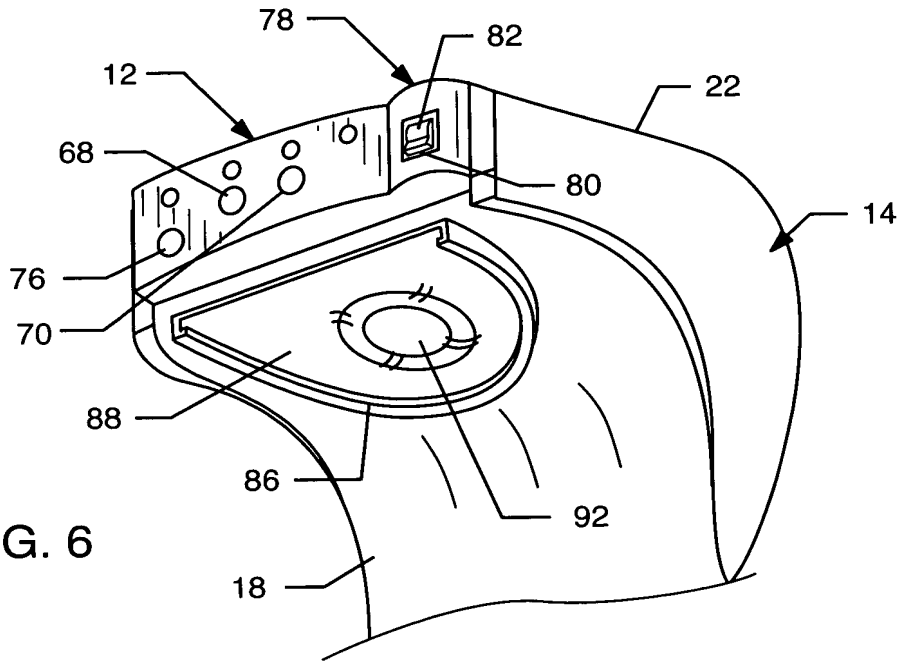
78
82
12
22
68
80
14
76
70
88
86
92
18

FIG. 6

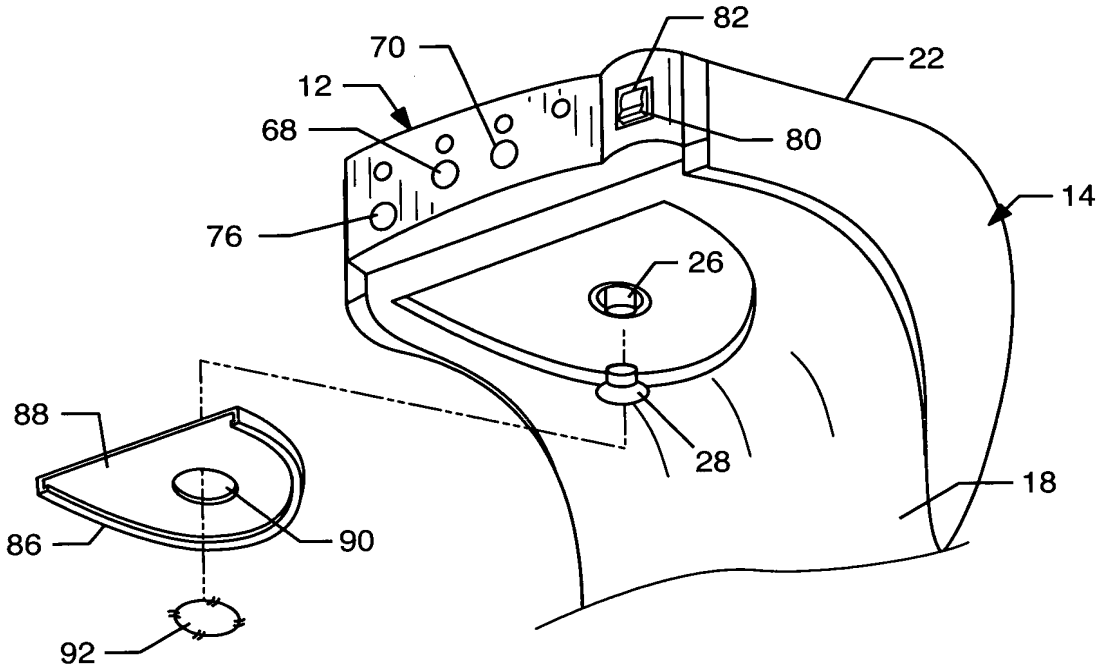
82
70
22
12
68
80
14
76
26
88
28
18
86
90
92

FIG. 7